

TRENDY LED

■
Illuminare con eleganza
Lighting with elegance



Soluzioni led ad alta tecnologia
High technology led solutions



CARATTERISTICHE TECNICHE

I moderni e versatili apparecchi a sospensione della serie TRENDY LED emettono una luce diretta e confortevole particolarmente adatta all'utilizzo in ambienti residenziali, uffici ed interni commerciali e sono ideali per l'illuminazione di tavoli, piani di lavoro, banchi espositivi, ristoranti, negozi e vetrine. La sorgente luminosa incorporata nell'apparecchio è del tipo a risparmio energetico ed è costituita da un un multichip led di grande efficienza da 13W nominali di potenza

che eroga 900 lm di flusso nella tonalità di luce bianco caldo da 3000°K con un elevato indice di resa cromatica pari a 85 e una durata di vita attesa di 50.000 ore. Gli apparecchi TRENDY LED sono composti da un corpo in alluminio pressofuso, verniciato con polveri poliestere, e da diverse ottiche che comprendono riflettori in alluminio di diametro 315 mm. e 415 mm. e svariati diffusori in materiale acrilico prismatico, e a richiesta anche in policarbonato, di diame-

tro 315 mm., disponibili in versioni trasparenti, trasparenti con trattamento interno riflettente, semi-opaline, opaline ed anche colorate, per aggiungere un tono di particolare caratterizzazione all'ambiente. Gli apparecchi TRENDY LED sono equipaggiati di rosone e cavo di sospensione da 1,5 m. Le versioni con riflettore in alluminio possono essere dotate, a richiesta, di un vetro piano temperato di protezione operato diffusivo.



TRENDY LED - riflettore
Ø 315 aperto
TRENDY LED - open
Ø 315 reflector

TRENDY LED RP VD - riflettore
Ø 415 con vetro diffusivo
TRENDY LED RP VD - Ø 415
reflector with diffusive glass



TRENDY LED VD - riflettore
Ø 315 con vetro diffusivo
TRENDY LED VD - Ø 315
reflector with diffusive glass

TRENDY LED RP - riflettore Ø 415 aperto
TRENDY LED RP - open Ø 415 reflector



TECHNICAL SPECIFICATIONS

Modern and versatile TRENDY LED suspension luminaires series offer a direct and comfortable light emission particularly suitable for usage in residential and commercial interiors and in offices, ideal for the lighting of tables, working planes, exposition surfaces, restaurants, shops and shop windows. Incorporated energy saving light source is a very high efficiency 13W nominal power multichip led that outputs 900 lm of flux in a 3000°K warm white light colour with an high colour rendering index equal to 85 and

an expected lifetime of 50.000 hours. TRENDY LED luminaires are composed by a die-cast body, painted with polyester powders, and from several optics including aluminium reflectors with 315 mm. and 415 mm. diameter and acrylic, and on demand also polycarbonate, prismatic diffusers with 315 mm. diameter, available in transparent, transparent with reflecting treatment, frosted, opal and also coloured versions to add a peculiar characterisation to the environment. TRENDY LED luminaires are equipped

with a ceiling base and 1,5 m. of cable. Models with aluminium reflectors can be equipped with an optional protective transparent plane tempered glass with diffusive graining.



TRENDY LED GF - diffusore semi-opalino
TRENDY LED GF - frosted diffuser



TRENDY LED GO - diffusore opalino
TRENDY LED GO - opal diffuser



TRENDY LED GT/TI diffusore trasparente
con trattamento riflettente
TRENDY LED GT/TI transparent diffuser
with reflective treatment



TRENDY LED GT - diffusore trasparente
TRENDY LED GT - transparent diffuser





TRENDY LED GV
diffusore verde
TRENDY LED GV
green diffuser

TRENDY LED GR
diffusore rosso
TRENDY LED GR
red diffuser


TRENDY LED GG
diffusore giallo
TRENDY LED GG
yellow diffuser

TRENDY LED GB
diffusore blu
TRENDY LED GB
blue diffuser

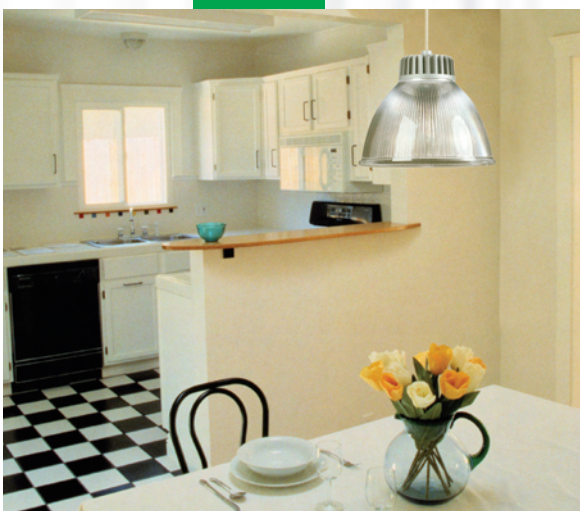

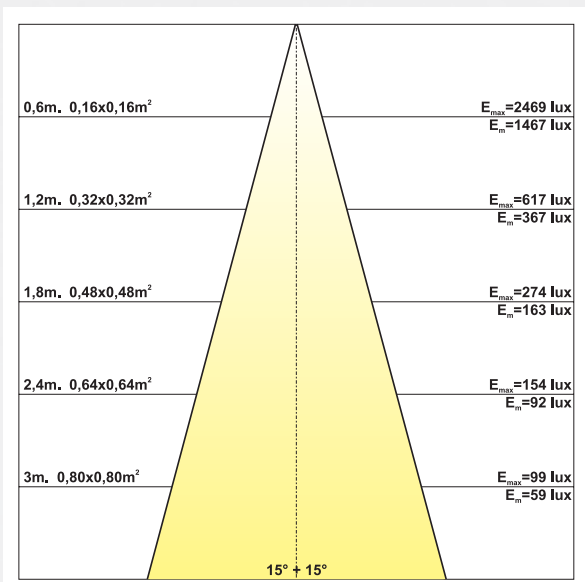


Mod. TRENDY LED

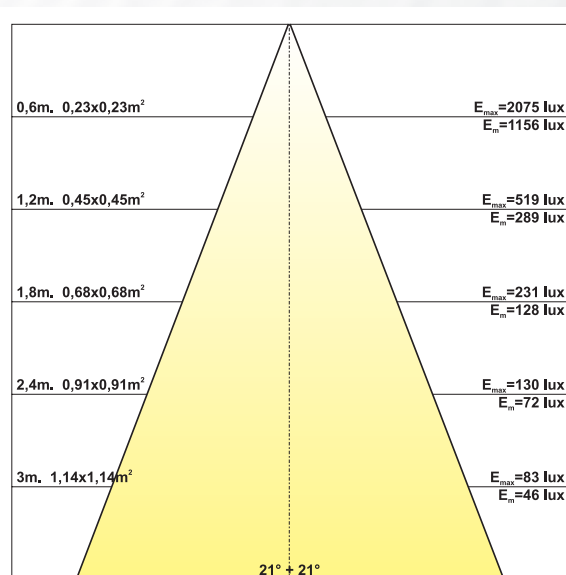


Mod. TRENDY LED GT

Modello Model	Codice Code	Potenza (W) Power (W)	Tipo LED LED type	Alimentazione Power supply	Classe Class	Grado IP IP degree	Volume (m3)	Peso (Kg.) Weight (Kg.)
TRENDY LED	45100-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,200
TRENDY LED VD	45101-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,900
TRENDY LED RP	45104-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,079	1,600
TRENDY LED RPVD	45105-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,079	2,800
TRENDY LED GT	45108-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GT/TI	45113-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GF	45122-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GO	45114-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GB	45109-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GG	45110-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GR	45111-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500
TRENDY LED GV	45112-C63	15	Bianco Caldo / Warm White	220-240V 50-60Hz	II	20	0,039	1,500


Dimensioni Dimensions

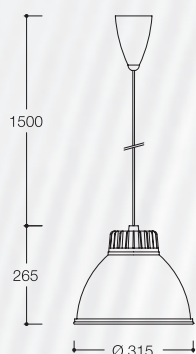

Trendy LED

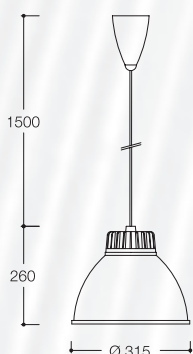

Trendy LED G...

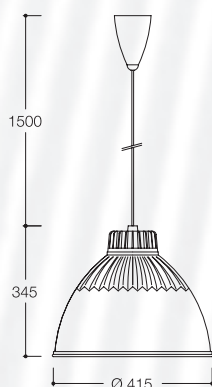

Trendy LED RP



LEG ILLUMINATION S.r.l.
Via Boncompagni, 3/B - 20139 Milano - Italy
Tel.++39 02 55210655 Fax ++39 02 55210617
www.legillumination.it
info@legillumination.it